

# LED

Track Lights  
catalogue



EXTENDED FAMILY

SIX RECESSED\_154  
SIX\_210

SIX 48V



|           |         |        |    |    |  | P      | CCT    | Beam | I      | Flux    | LOR  |
|-----------|---------|--------|----|----|--|--------|--------|------|--------|---------|------|
| SIX L 48V | A329-0- | Ⓢ -10- | WT | NT |  | 24,5 W | 2700 K | 17°  | 700 mA | 2850 Lm | 93 % |
|           | A329-0- | Ⓢ -11- | WT | NT |  | 24,5 W | 3000 K | 17°  | 700 mA | 2950 Lm | 93 % |
|           | A329-0- | Ⓢ -12- | WT | NT |  | 24,5 W | 4000 K | 17°  | 700 mA | 3000 Lm | 93 % |
|           | A329-0- | Ⓢ -30- | WT | NT |  | 24,5 W | 2700 K | 26°  | 700 mA | 2850 Lm | 93 % |
|           | A329-0- | Ⓢ -31- | WT | NT |  | 24,5 W | 3000 K | 26°  | 700 mA | 2950 Lm | 93 % |
|           | A329-0- | Ⓢ -32- | WT | NT |  | 24,5 W | 4000 K | 26°  | 700 mA | 3000 Lm | 93 % |
|           | A329-0- | Ⓢ -20- | WT | NT |  | 24,5 W | 2700 K | 34°  | 700 mA | 2850 Lm | 90 % |
|           | A329-0- | Ⓢ -21- | WT | NT |  | 24,5 W | 3000 K | 34°  | 700 mA | 2950 Lm | 90 % |
|           | A329-0- | Ⓢ -22- | WT | NT |  | 24,5 W | 4000 K | 34°  | 700 mA | 3000 Lm | 90 % |

LED | 48 V | CE | III | IP20 | CRI>90 | L80B10 > 60.000 h



|           |         |        |    |    |  | P    | CCT    | Beam | I      | Flux    | LOR  |
|-----------|---------|--------|----|----|--|------|--------|------|--------|---------|------|
| SIX M 48V | A330-0- | Ⓢ -10- | WT | NT |  | 17 W | 2700 K | 19°  | 500 mA | 2050 Lm | 93 % |
|           | A330-0- | Ⓢ -11- | WT | NT |  | 17 W | 3000 K | 19°  | 500 mA | 2130 Lm | 93 % |
|           | A330-0- | Ⓢ -12- | WT | NT |  | 17 W | 4000 K | 19°  | 500 mA | 2160 Lm | 93 % |
|           | A330-0- | Ⓢ -20- | WT | NT |  | 17 W | 2700 K | 28°  | 500 mA | 2050 Lm | 91 % |
|           | A330-0- | Ⓢ -21- | WT | NT |  | 17 W | 3000 K | 28°  | 500 mA | 2130 Lm | 91 % |
|           | A330-0- | Ⓢ -22- | WT | NT |  | 17 W | 4000 K | 28°  | 500 mA | 2160 Lm | 91 % |
|           | A330-0- | Ⓢ -30- | WT | NT |  | 17 W | 2700 K | 38°  | 500 mA | 2050 Lm | 93 % |
|           | A330-0- | Ⓢ -31- | WT | NT |  | 17 W | 3000 K | 38°  | 500 mA | 2130 Lm | 93 % |
|           | A330-0- | Ⓢ -32- | WT | NT |  | 17 W | 4000 K | 38°  | 500 mA | 2160 Lm | 93 % |

LED | 48 V | CE | III | IP20 | CRI>90 | L80B10 > 60.000 h



#### Ⓢ \*OPTIONS

|   |          |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |

## ACCESSORIES


SIX L High Chromatic LED\*\*

SIX M High Chromatic LED\*\*


NOT SOLD SEPARATELY



SIX L 48V



SIX M 48V

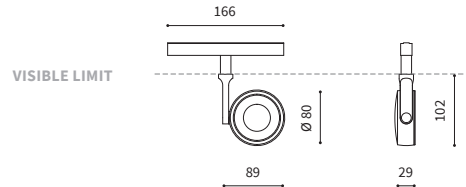


COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL | AL | PC |

\*\* ACCESSORY & COLOURS AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT

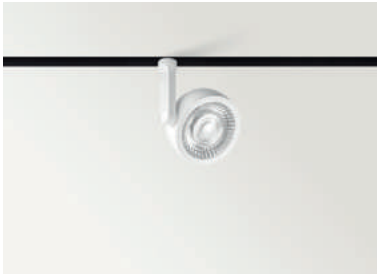

|           |         |        |    |    |  | P     | CCT    | Beam | I      | Flux    | LOR  |
|-----------|---------|--------|----|----|--|-------|--------|------|--------|---------|------|
| SIX S 48V | A333-0- | Ⓢ -10- | WT | NT |  | 8,5 W | 2700 K | 17°  | 500 mA | 1030 Lm | 86 % |
|           | A333-0- | Ⓢ -11- | WT | NT |  | 8,5 W | 3000 K | 17°  | 500 mA | 1070 Lm | 86 % |
|           | A333-0- | Ⓢ -12- | WT | NT |  | 8,5 W | 4000 K | 17°  | 500 mA | 1100 Lm | 86 % |
|           | A333-0- | Ⓢ -20- | WT | NT |  | 8,5 W | 2700 K | 24°  | 500 mA | 1030 Lm | 84 % |
|           | A333-0- | Ⓢ -21- | WT | NT |  | 8,5 W | 3000 K | 24°  | 500 mA | 1070 Lm | 84 % |
|           | A333-0- | Ⓢ -22- | WT | NT |  | 8,5 W | 4000 K | 24°  | 500 mA | 1100 Lm | 84 % |
|           | A333-0- | Ⓢ -30- | WT | NT |  | 8,5 W | 2700 K | 34°  | 500 mA | 1030 Lm | 89 % |
|           | A333-0- | Ⓢ -31- | WT | NT |  | 8,5 W | 3000 K | 34°  | 500 mA | 1070 Lm | 89 % |
|           | A333-0- | Ⓢ -32- | WT | NT |  | 8,5 W | 4000 K | 34°  | 500 mA | 1100 Lm | 89 % |



48 V



IP20

CRI > 90

L80B10  
> 60.000 h



MacAdam  
Step 2



OPTIONS\*



INCL



TRACK 48V



360°



310°



17° / 24° / 34°

#### \*OPTIONS

|   |          |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |


## ACCESSORY

### SIX S High Chromatic LED\*\*

NOT SOLD SEPARATELY



#### SIX S 48V

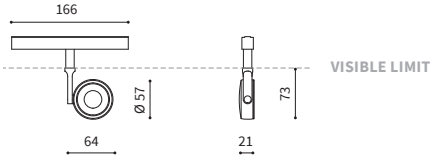


Pending

COLOUR | WT ☐ RAL 9016 | NT ☒ RAL 9005 |

MATERIAL | ☒ AL | ☐ PC |

\*\* ACCESSORY & COLOURS AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT

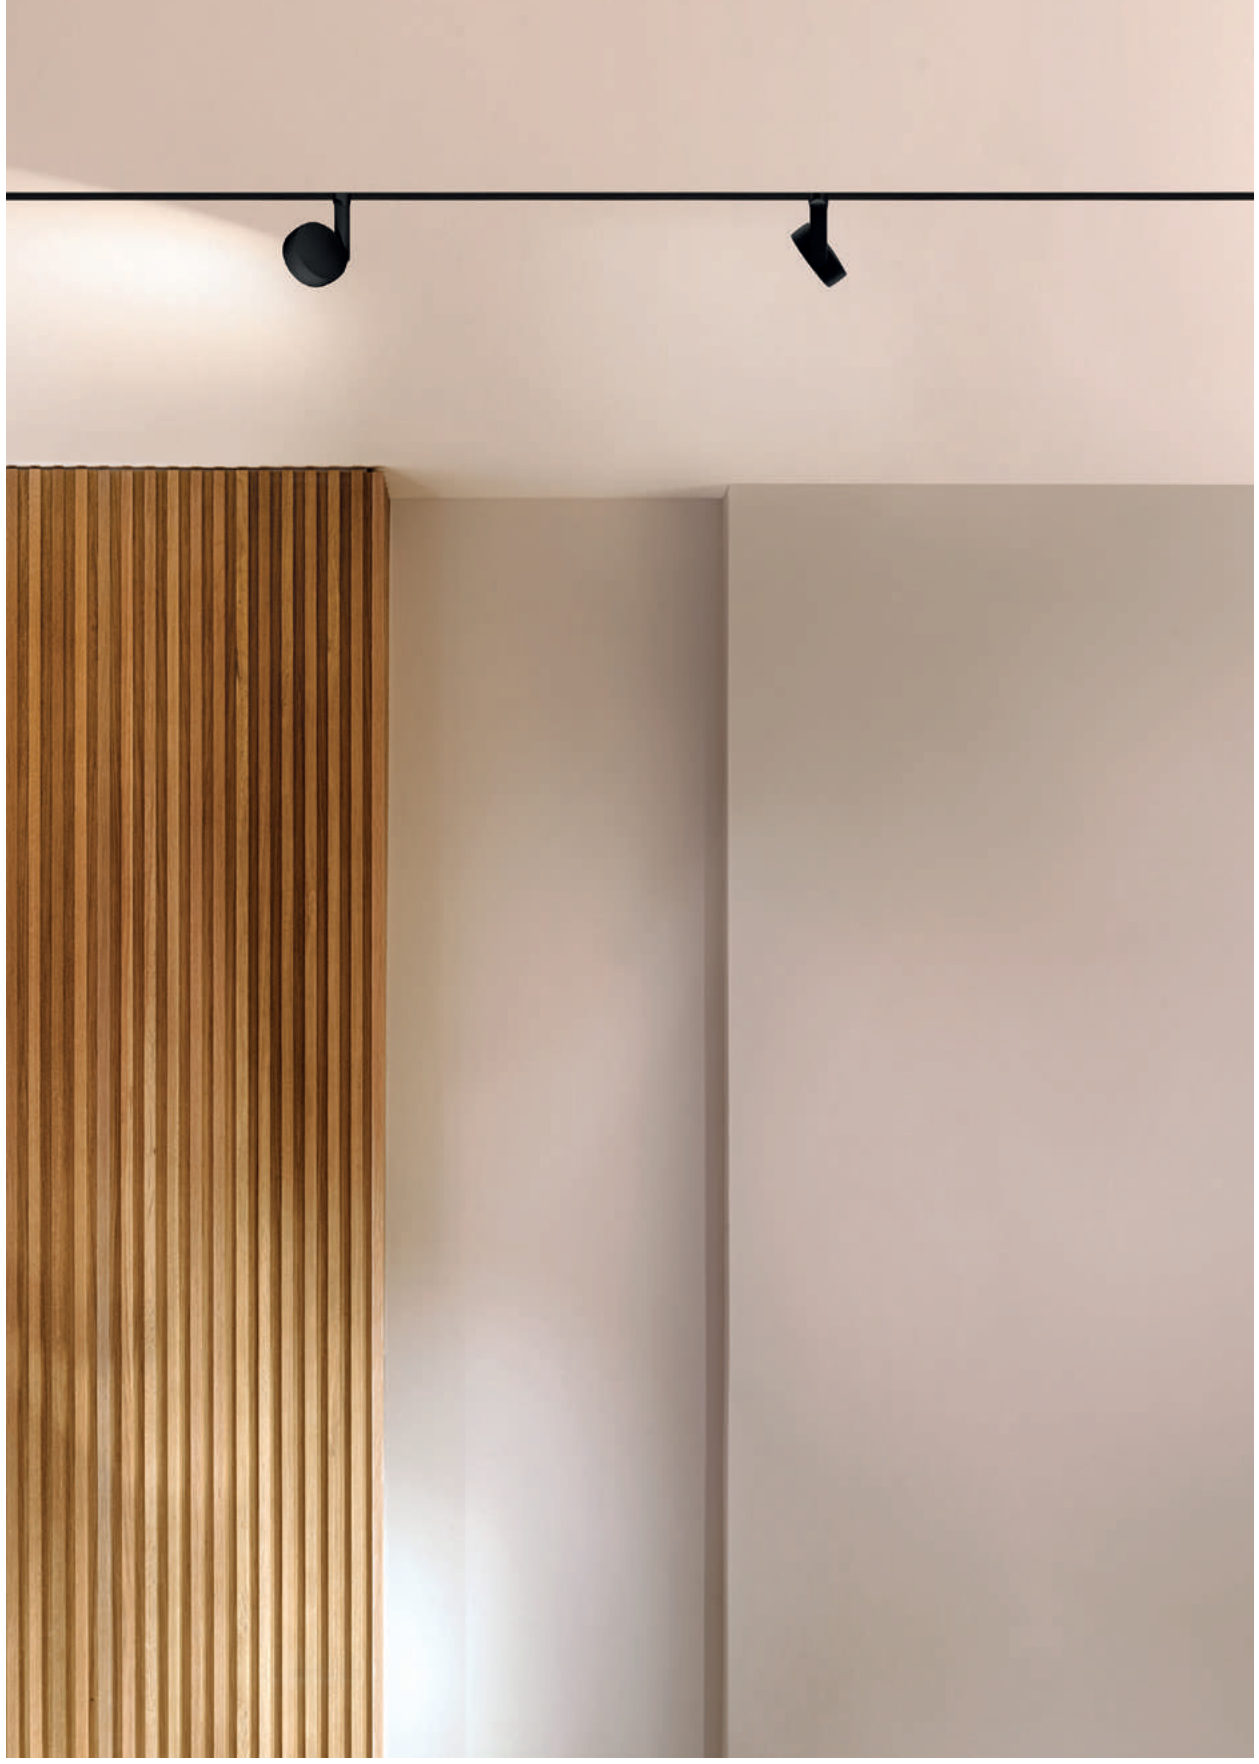



|                   |                |        |    |    |  | P     | CCT    | Beam | I      | Flux   | LOR  |
|-------------------|----------------|--------|----|----|--|-------|--------|------|--------|--------|------|
| <b>SIX XS 48V</b> | <b>A335-0-</b> | ☉ -10- | WT | NT |  | 4,5 W | 2700 K | 17°  | 500 mA | 470 Lm | 90 % |
|                   | <b>A335-0-</b> | ☉ -11- | WT | NT |  | 4,5 W | 3000 K | 17°  | 500 mA | 500 Lm | 90 % |
|                   | <b>A335-0-</b> | ☉ -12- | WT | NT |  | 4,5 W | 4000 K | 17°  | 500 mA | 530 Lm | 90 % |
|                   | <b>A335-0-</b> | ☉ -20- | WT | NT |  | 4,5 W | 2700 K | 23°  | 500 mA | 470 Lm | 86 % |
|                   | <b>A335-0-</b> | ☉ -21- | WT | NT |  | 4,5 W | 3000 K | 23°  | 500 mA | 500 Lm | 86 % |
|                   | <b>A335-0-</b> | ☉ -22- | WT | NT |  | 4,5 W | 4000 K | 23°  | 500 mA | 530 Lm | 86 % |
|                   | <b>A335-0-</b> | ☉ -30- | WT | NT |  | 4,5 W | 2700 K | 34°  | 500 mA | 470 Lm | 88 % |
|                   | <b>A335-0-</b> | ☉ -31- | WT | NT |  | 4,5 W | 3000 K | 34°  | 500 mA | 500 Lm | 88 % |
|                   | <b>A335-0-</b> | ☉ -32- | WT | NT |  | 4,5 W | 4000 K | 34°  | 500 mA | 530 Lm | 88 % |

LED

48 V

CE

III

IP20

CRI >90

L80B10 > 60.000 h

MacAdam Step 2

OPTIONS\*

INCL

TRACK 48V

360°

310°

17° / 23° / 34°

|                          |                |        |    |    |  | P   | CCT    | Beam | I      | Flux       | LOR  |
|--------------------------|----------------|--------|----|----|--|-----|--------|------|--------|------------|------|
| <b>SIX XS 48V Double</b> | <b>A335-1-</b> | ☉ -10- | WT | NT |  | 9 W | 2700 K | 17°  | 500 mA | 2 X 470 Lm | 90 % |
|                          | <b>A335-1-</b> | ☉ -11- | WT | NT |  | 9 W | 3000 K | 17°  | 500 mA | 2 X 500 Lm | 90 % |
|                          | <b>A335-1-</b> | ☉ -12- | WT | NT |  | 9 W | 4000 K | 17°  | 500 mA | 2 X 530 Lm | 90 % |
|                          | <b>A335-1-</b> | ☉ -20- | WT | NT |  | 9 W | 2700 K | 23°  | 500 mA | 2 X 470 Lm | 86 % |
|                          | <b>A335-1-</b> | ☉ -21- | WT | NT |  | 9 W | 3000 K | 23°  | 500 mA | 2 X 500 Lm | 86 % |
|                          | <b>A335-1-</b> | ☉ -22- | WT | NT |  | 9 W | 4000 K | 23°  | 500 mA | 2 X 530 Lm | 86 % |
|                          | <b>A335-1-</b> | ☉ -30- | WT | NT |  | 9 W | 2700 K | 34°  | 500 mA | 2 X 470 Lm | 88 % |
|                          | <b>A335-1-</b> | ☉ -31- | WT | NT |  | 9 W | 3000 K | 34°  | 500 mA | 2 X 500 Lm | 88 % |
|                          | <b>A335-1-</b> | ☉ -32- | WT | NT |  | 9 W | 4000 K | 34°  | 500 mA | 2 X 530 Lm | 88 % |

LED

48 V

CE

III

IP20

CRI >90

L80B10 > 60.000 h

MacAdam Step 2

OPTIONS\*

INCL

TRACK 48V

360°

310°

17° / 23° / 34°

| ☉ | *OPTIONS |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |


## ACCESSORY

**SIX XS High Chromatic LED\*\***


NOT SOLD SEPARATELY



SIX XS 48V



SIX XS 48V DOUBLE



COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL | AL | PC |

\*\* ACCESSORY & COLOURS AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



Photography: BISimages Architectural Photography



Kelomo, Elda (Spain) | Design: Pablo Muñoz Payá Arquitectos | Photography: Jesús Granada - Fotografía de Arquitectura

EXTENDED FAMILY

FIT RECESSED\_160  
FIT\_214

FIT 48V



|             |         |        |    |    |  | P   | CCT    | Beam | I       | Flux    | LOR  |
|-------------|---------|--------|----|----|--|-----|--------|------|---------|---------|------|
| FIT Ø50 48V | A346-0- | ① -10- | WT | NT |  | 12W | 2700 K | 15°  | 1050 mA | 1040 Lm | 85 % |
|             | A346-0- | ① -11- | WT | NT |  | 12W | 3000 K | 15°  | 1050 mA | 1120 Lm | 85 % |
|             | A346-0- | ① -20- | WT | NT |  | 12W | 2700 K | 28°  | 1050 mA | 1040 Lm | 82 % |
|             | A346-0- | ① -21- | WT | NT |  | 12W | 3000 K | 28°  | 1050 mA | 1120 Lm | 82 % |
|             | A346-0- | ① -30- | WT | NT |  | 12W | 2700 K | 47°  | 1050 mA | 1040 Lm | 80 % |
|             | A346-0- | ① -31- | WT | NT |  | 12W | 3000 K | 47°  | 1050 mA | 1120 Lm | 80 % |

LED

48 V

CE

III

IP20

CRI >90

L80B10  
> 60.000 h

MacAdam  
Step 2

OPTIONS\*

INCL

TRACK 48V

360°

90°


15°/28°/47°

| ① | *OPTIONS |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |

ACCESSORY


FIT Ø50 Anti-glare Honeycomb Louver \*\* A346-00-00

NOT SOLD SEPARATELY

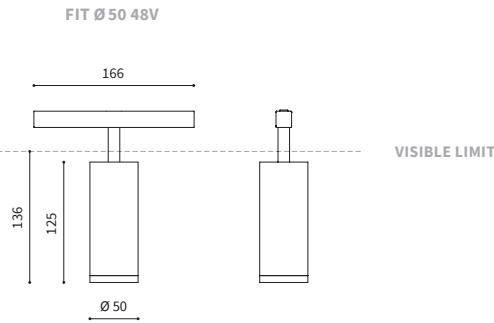


COLOUR | WT ☐ RAL 9016 | NT ☒ RAL 9005 | MATERIAL | ☒ AL | ☐ PC |

\*\* ACCESSORY AFFECTS THE LIGHTING PARAMETERS  » PLEASE CONSULT

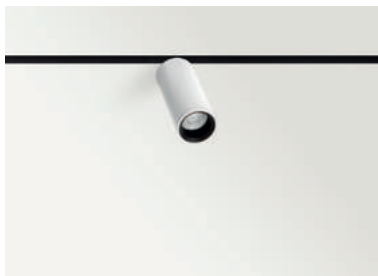

|             |         |        |    |    |  | P     | CCT    | Beam | I      | Flux   | LOR  |
|-------------|---------|--------|----|----|--|-------|--------|------|--------|--------|------|
| FIT Ø35 48V | A345-0- | Ⓢ -10- | WT | NT |  | 5,5 W | 2700 K | 19°  | 500 mA | 590 Lm | 82 % |
|             | A345-0- | Ⓢ -11- | WT | NT |  | 5,5 W | 3000 K | 19°  | 500 mA | 630 Lm | 82 % |
|             | A345-0- | Ⓢ -20- | WT | NT |  | 5,5 W | 2700 K | 29°  | 500 mA | 590 Lm | 80 % |
|             | A345-0- | Ⓢ -21- | WT | NT |  | 5,5 W | 3000 K | 29°  | 500 mA | 630 Lm | 80 % |
|             | A345-0- | Ⓢ -30- | WT | NT |  | 5,5 W | 2700 K | 38°  | 500 mA | 590 Lm | 80 % |
|             | A345-0- | Ⓢ -31- | WT | NT |  | 5,5 W | 3000 K | 38°  | 500 mA | 630 Lm | 80 % |

LED | 48 V | CE | III | IP20 | CRI >90 | L80B10 > 60.000 h

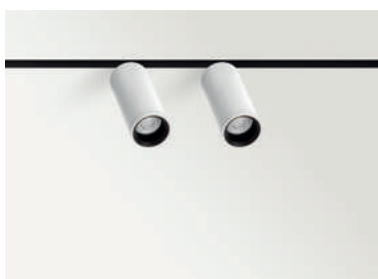

|                    |         |        |    |    |  | P    | CCT    | Beam | I      | Flux       | LOR  |
|--------------------|---------|--------|----|----|--|------|--------|------|--------|------------|------|
| FIT Ø35 48V Double | A345-1- | Ⓢ -10- | WT | NT |  | 11 W | 2700 K | 19°  | 500 mA | 2 x 590 Lm | 82 % |
|                    | A345-1- | Ⓢ -11- | WT | NT |  | 11 W | 3000 K | 19°  | 500 mA | 2 x 630 Lm | 82 % |
|                    | A345-1- | Ⓢ -20- | WT | NT |  | 11 W | 2700 K | 29°  | 500 mA | 2 x 590 Lm | 80 % |
|                    | A345-1- | Ⓢ -21- | WT | NT |  | 11 W | 3000 K | 29°  | 500 mA | 2 x 630 Lm | 80 % |
|                    | A345-1- | Ⓢ -30- | WT | NT |  | 11 W | 2700 K | 38°  | 500 mA | 2 x 590 Lm | 80 % |
|                    | A345-1- | Ⓢ -31- | WT | NT |  | 11 W | 3000 K | 38°  | 500 mA | 2 x 630 Lm | 80 % |

LED | 48 V | CE | III | IP20 | CRI >90 | L80B10 > 60.000 h





Ⓢ \*OPTIONS

|   |          |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |

## ACCESSORY

FIT Ø35 Anti-glare Honeycomb Louver \*\* A345-00-00

NOT SOLD SEPARATELY

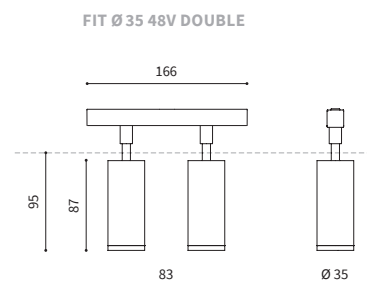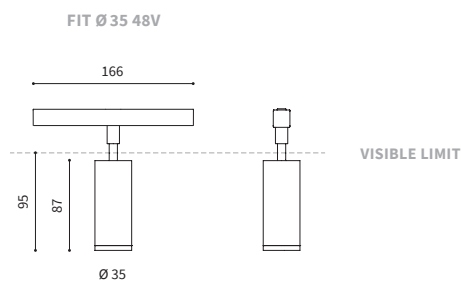

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |


MATERIAL | AL | PC |

\*\* ACCESSORY AFFECTS THE LIGHTING PARAMETERS


» PLEASE CONSULT





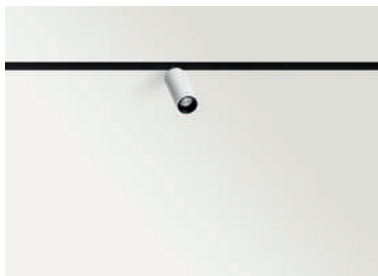


|                    |                |        |    |    | P     | CCT    | Beam | I      | Flux   | LOR  |
|--------------------|----------------|--------|----|----|-------|--------|------|--------|--------|------|
| <b>FIT Ø20 48V</b> | <b>A344-0-</b> | ⊙ -10- | WT | NT | 2,1 W | 2700 K | 12°  | 700 mA | 127 Lm | 87 % |
|                    | <b>A344-0-</b> | ⊙ -11- | WT | NT | 2,1 W | 3000 K | 12°  | 700 mA | 150 Lm | 87 % |
|                    | <b>A344-0-</b> | ⊙ -20- | WT | NT | 2,1 W | 2700 K | 30°  | 700 mA | 127 Lm | 88 % |
|                    | <b>A344-0-</b> | ⊙ -21- | WT | NT | 2,1 W | 3000 K | 30°  | 700 mA | 150 Lm | 88 % |
|                    | <b>A344-0-</b> | ⊙ -30- | WT | NT | 2,1 W | 2700 K | 54°  | 700 mA | 127 Lm | 81 % |
|                    | <b>A344-0-</b> | ⊙ -31- | WT | NT | 2,1 W | 3000 K | 54°  | 700 mA | 150 Lm | 81 % |

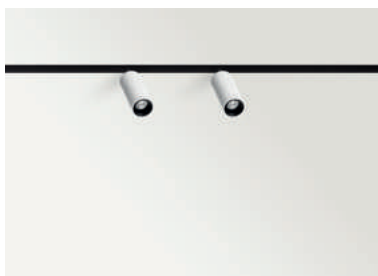


|                           |                |        |    |    | P     | CCT    | Beam | I      | Flux       | LOR  |
|---------------------------|----------------|--------|----|----|-------|--------|------|--------|------------|------|
| <b>FIT Ø20 48V Double</b> | <b>A344-1-</b> | ⊙ -10- | WT | NT | 4,2 W | 2700 K | 12°  | 700 mA | 2 x 127 Lm | 87 % |
|                           | <b>A344-1-</b> | ⊙ -11- | WT | NT | 4,2 W | 3000 K | 12°  | 700 mA | 2 x 150 Lm | 87 % |
|                           | <b>A344-1-</b> | ⊙ -20- | WT | NT | 4,2 W | 2700 K | 30°  | 700 mA | 2 x 127 Lm | 88 % |
|                           | <b>A344-1-</b> | ⊙ -21- | WT | NT | 4,2 W | 3000 K | 30°  | 700 mA | 2 x 150 Lm | 88 % |
|                           | <b>A344-1-</b> | ⊙ -30- | WT | NT | 4,2 W | 2700 K | 54°  | 700 mA | 2 x 127 Lm | 81 % |
|                           | <b>A344-1-</b> | ⊙ -31- | WT | NT | 4,2 W | 3000 K | 54°  | 700 mA | 2 x 150 Lm | 81 % |



| ⊙        | *OPTIONS |
|----------|----------|
| <b>1</b> | No DIM   |
| <b>2</b> | DIM DALI |

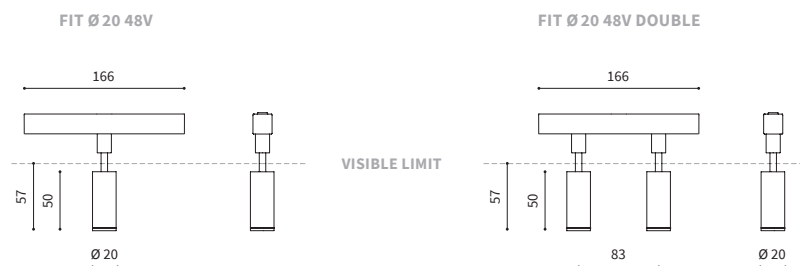

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 | MATERIAL | AL | PC |

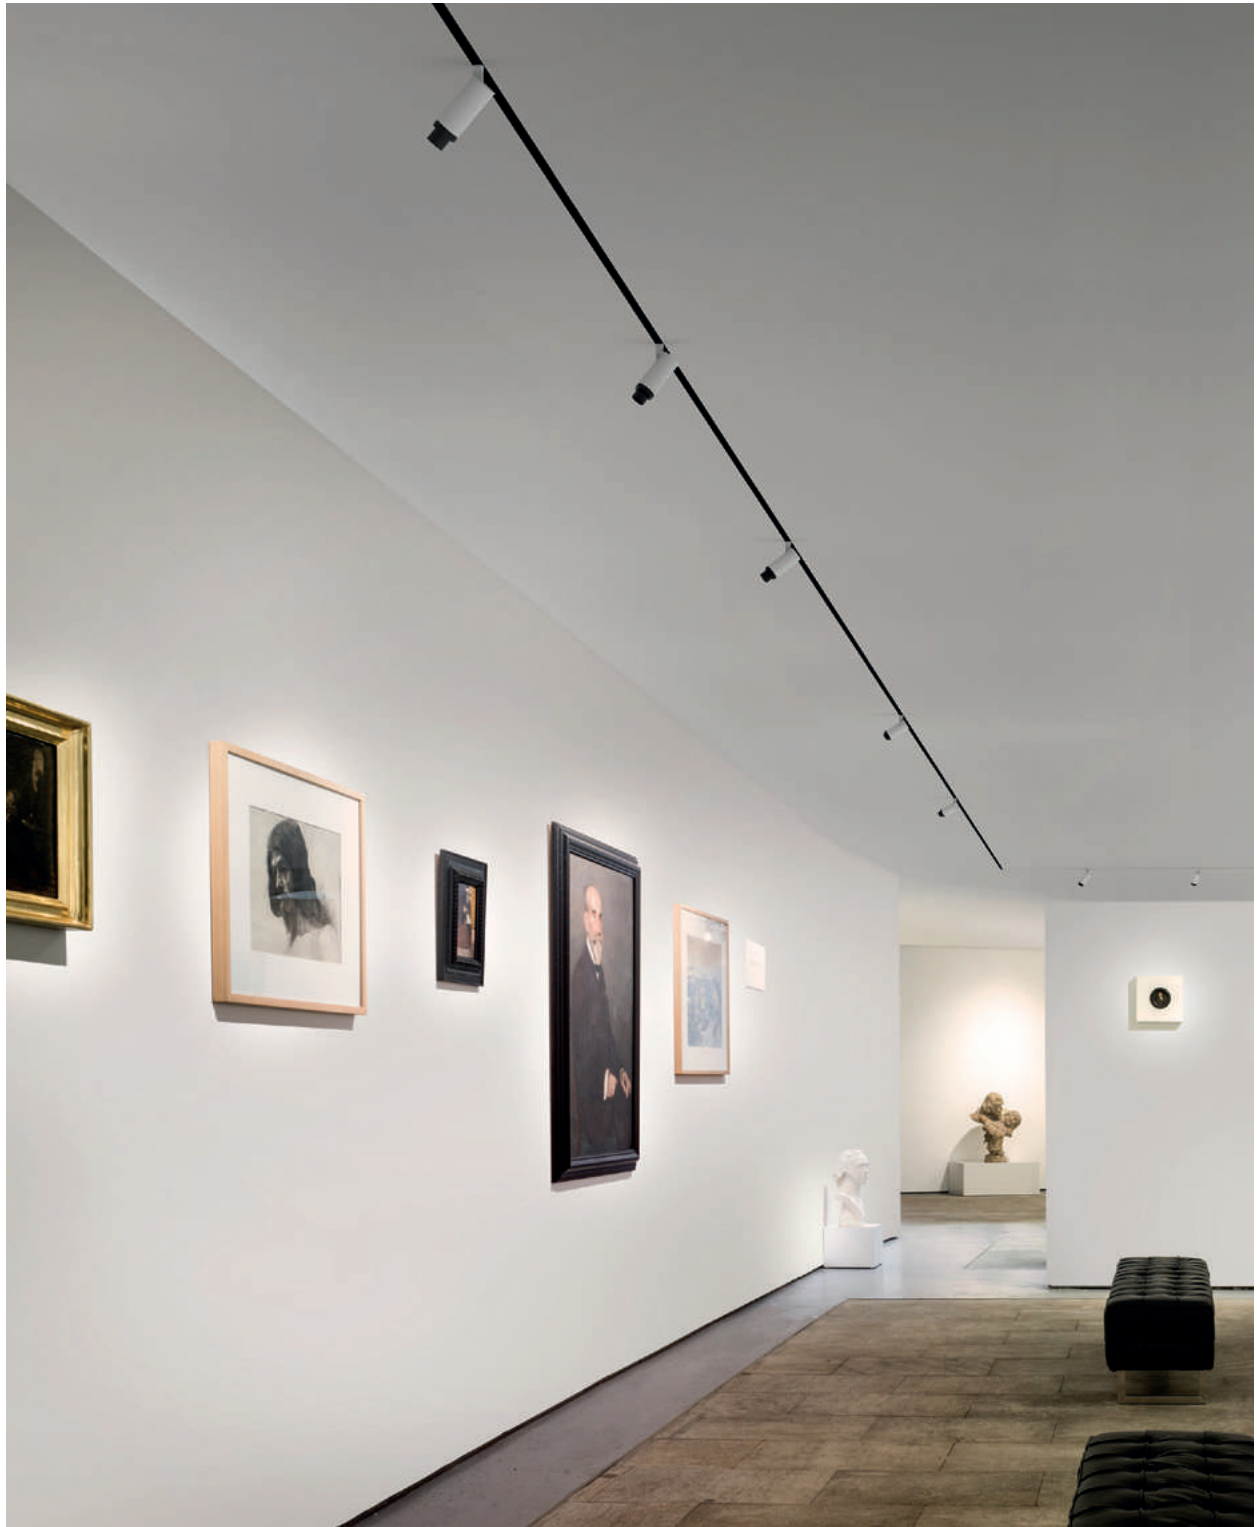


Photography: Jesús Granada - Fotografía de Arquitectura

EXTENDED FAMILY

PLUS RECESSED\_162  
PLUS MINI 1L\_206  
PLUS\_218

PLUS 48V

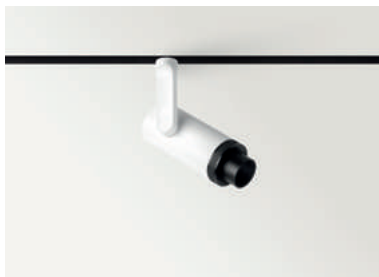

|          |          |        |    |    |  | P   | CCT    | Beam      | I      | Flux    | LOR       |
|----------|----------|--------|----|----|--|-----|--------|-----------|--------|---------|-----------|
| PLUS 48V | A323-00- | 00 -0- | WT | NT |  | 18W | 2700 K | 12° - 51° | 500 mA | 1920 Lm | 26 - 40 % |
|          | A323-00- | 00 -1- | WT | NT |  | 18W | 3000 K | 12° - 51° | 500 mA | 2000 Lm | 26 - 40 % |
|          | A323-00- | 00 -2- | WT | NT |  | 18W | 4000 K | 12° - 51° | 500 mA | 2030 Lm | 26 - 40 % |

LED | 48 V | CE | III | IP20 | CRI > 90 | L80B10 > 60.000 h | 
 MacAdam Step 2 | OPTIONS\* | INCL | TRACK 48V | 360° | 180° | 12°-51° | 12°-51°

|               |          |        |    |    |  | P     | CCT    | Beam      | I      | Flux   | LOR       |
|---------------|----------|--------|----|----|--|-------|--------|-----------|--------|--------|-----------|
| PLUS Mini 48V | A326-00- | 00 -0- | WT | NT |  | 6,5 W | 2700 K | 10° - 41° | 700 mA | 630 Lm | 20 - 40 % |
|               | A326-00- | 00 -1- | WT | NT |  | 6,5 W | 3000 K | 10° - 41° | 700 mA | 660 Lm | 20 - 40 % |
|               | A326-00- | 00 -2- | WT | NT |  | 6,5 W | 4000 K | 10° - 41° | 700 mA | 680 Lm | 20 - 40 % |

LED | 48 V | CE | III | IP20 | CRI > 90 | L80B10 > 60.000 h | 
 MacAdam Step 2 | OPTIONS\* | INCL | TRACK 48V | 360° | 180° | 10°-41° | 10°-41°


|   | *OPTIONS |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |

## ACCESSORY

PLUS High Chromatic LED\*\*

PLUS MINI High Chromatic LED\*\*

NOT SOLD SEPARATELY

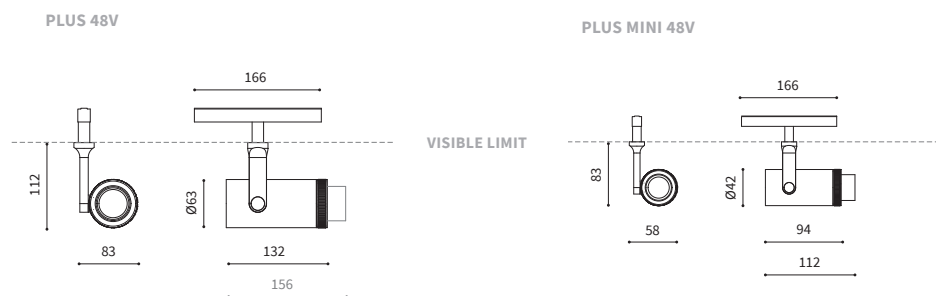

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 | MATERIAL | AL | OPTICAL GLASS |

\*\* ACCESSORY AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT








Arkoslight Headquarters, Valencia (Spain) | Design: Francesc Rifé Studio | Architect: Víctor García Martínez Arquitecto | Photography: Héctor Rubio · Images Positive



EXTENDED FAMILY

iO\_204  
iO SURFACE\_262  
iO RECESSED PROFILE\_326

iO 48V

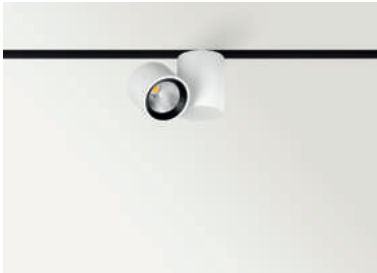

|        |         |        |    |    | P     | CCT    | Beam | I      | Flux   | LOR  |
|--------|---------|--------|----|----|-------|--------|------|--------|--------|------|
| iO 48V | A348-0- | Ⓢ -10- | WT | NT | 4,5 W | 2700 K | 20°  | 500 mA | 485 Lm | 92 % |
|        | A348-0- | Ⓢ -11- | WT | NT | 4,5 W | 3000 K | 20°  | 500 mA | 505 Lm | 92 % |
|        | A348-0- | Ⓢ -20- | WT | NT | 4,5 W | 2700 K | 30°  | 500 mA | 485 Lm | 89 % |
|        | A348-0- | Ⓢ -21- | WT | NT | 4,5 W | 3000 K | 30°  | 500 mA | 505 Lm | 89 % |
|        | A348-0- | Ⓢ -30- | WT | NT | 4,5 W | 2700 K | 56°  | 500 mA | 485 Lm | 86 % |
|        | A348-0- | Ⓢ -31- | WT | NT | 4,5 W | 3000 K | 56°  | 500 mA | 505 Lm | 86 % |



48 V



IP 20

CRI >90

L80B10  
> 60.000 h



#### Ⓢ \*OPTIONS

|   |          |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |

## ACCESSORIES

NOT SOLD SEPARATELY

### iO High Chromatic LED\*\*




### iO Beam Mixer Diffuser\*\*

0805-01-00



### iO Anti-glare Honeycomb Louver\*\*

0806-00-00 | WT | NT

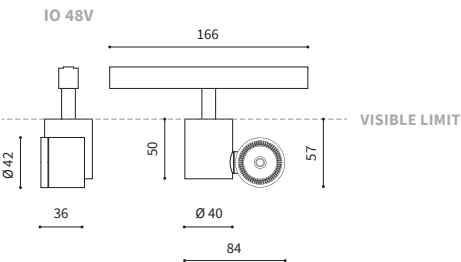

COLOUR | WT RAL 9016 | NT RAL 9005

MATERIAL | AL | PC

\*\* AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



EXTENDED FAMILY

ZEN TUBE\_222

ZEN TUBE SURFACE\_266

# ZEN TUBE 48V



|                |          |       |    |    |  | P    | CCT    | I      | Flux    | LOR  |
|----------------|----------|-------|----|----|--|------|--------|--------|---------|------|
| ZEN TUBE 48V 1 | A341-11- | ⊗ -0- | WT | NT |  | 12 W | 2700 K | 350 mA | 1580 Lm | 90 % |
|                | A341-11- | ⊗ -1- | WT | NT |  | 12 W | 3000 K | 350 mA | 1640 Lm | 90 % |
| ZEN TUBE 48V 2 | A341-12- | ⊗ -0- | WT | NT |  | 17 W | 2700 K | 500 mA | 2130 Lm | 90 % |
|                | A341-12- | ⊗ -1- | WT | NT |  | 17 W | 3000 K | 500 mA | 2220 Lm | 90 % |
| ZEN TUBE 48V 3 | A341-13- | ⊗ -0- | WT | NT |  | 23 W | 2700 K | 700 mA | 3070 Lm | 90 % |
|                | A341-13- | ⊗ -1- | WT | NT |  | 23 W | 3000 K | 700 mA | 3190 Lm | 90 % |
|                | A341-23- | ⊗ -0- | WT | NT |  | 23 W | 2700 K | 700 mA | 3070 Lm | 90 % |
|                | A341-23- | ⊗ -1- | WT | NT |  | 23 W | 3000 K | 700 mA | 3190 Lm | 90 % |



LED | 48 V | CE | III | IP20 | CRI > 90 | L80B10 > 60.000 h



| ⊗ | BEAM OPTIONS |
|---|--------------|
| 1 | 16°          |
| 2 | 24°          |
| 3 | 42°          |

## ACCESSORIES

NOT SOLD SEPARATELY

### ZEN High Chromatic LED\*



i » 366

### ZEN Anti-glare Honeycomb Louver \*

0702-02-00




### ZEN Elliptical Refractor \*

0700-08-00



### ZEN Beam Mixer Diffuser\*

0805-02-00

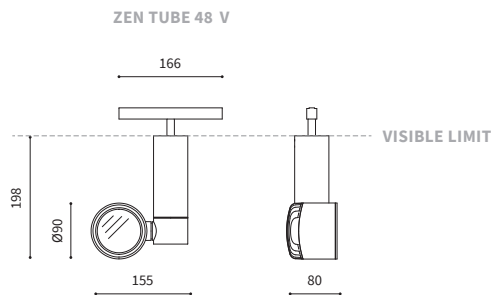

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL | AL | GL-TRANS |

\* AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



---

LINE 48V



|               |          |           | P      | CCT    | I      | Flux    | LOR  |
|---------------|----------|-----------|--------|--------|--------|---------|------|
| LINE 48V 550  | A347-10- | Ⓞ -0-   N | 12,5 W | 2700 K | 350 mA | 1665 Lm | 68 % |
|               | A347-10- | Ⓞ -1-   N | 12,5 W | 3000 K | 350 mA | 1675 Lm | 68 % |
| LINE 48V 1100 | A347-20- | Ⓞ -0-   N | 25 W   | 2700 K | 700 mA | 3330 Lm | 68 % |
|               | A347-20- | Ⓞ -1-   N | 25 W   | 3000 K | 700 mA | 3350 Lm | 68 % |

LED | 48 V | CE | III | IP20 | CRI >90 | L90B50 >50.000 h




Ⓞ \*OPTIONS

|   |          |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |

LINE 48V 550



LINE 48V 1100



COLOUR | N ■ | MATERIAL | AL | PC |

OTHER SIZES, CCT & OPTICS PLEASE CONSULT

» PLEASE CONSULT




  
**archiproducts**  
DESIGN AWARDS  
—  
WINNER 2018

EXTENDED FAMILY

TOP\_236

---

TOP 48V

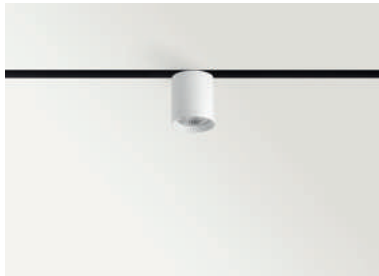

|         |         |        |    |    | P     | CCT    | Beam | I      | Flux   | LOR  |
|---------|---------|--------|----|----|-------|--------|------|--------|--------|------|
| TOP 48V | A339-0- | Ⓢ -10- | WT | NT | 6,5 W | 2700 K | 20°  | 700 mA | 610 Lm | 92 % |
|         | A339-0- | Ⓢ -11- | WT | NT | 6,5 W | 3000 K | 20°  | 700 mA | 640 Lm | 92 % |
|         | A339-0- | Ⓢ -20- | WT | NT | 6,5 W | 2700 K | 30°  | 700 mA | 610 Lm | 89 % |
|         | A339-0- | Ⓢ -21- | WT | NT | 6,5 W | 3000 K | 30°  | 700 mA | 640 Lm | 89 % |
|         | A339-0- | Ⓢ -30- | WT | NT | 6,5 W | 2700 K | 56°  | 700 mA | 610 Lm | 86 % |
|         | A339-0- | Ⓢ -31- | WT | NT | 6,5 W | 3000 K | 56°  | 700 mA | 640 Lm | 86 % |

LED | 48 V | CE | IP20 | CRI > 90 | L80B10 > 60.000 h




|              |         |        |    |    | P     | CCT    | Beam | I      | Flux   | LOR  |
|--------------|---------|--------|----|----|-------|--------|------|--------|--------|------|
| TOP MINI 48V | A340-0- | Ⓢ -10- | WT | NT | 6,5 W | 2700 K | 20°  | 700 mA | 610 Lm | 92 % |
|              | A340-0- | Ⓢ -11- | WT | NT | 6,5 W | 3000 K | 20°  | 700 mA | 640 Lm | 92 % |
|              | A340-0- | Ⓢ -20- | WT | NT | 6,5 W | 2700 K | 30°  | 700 mA | 610 Lm | 89 % |
|              | A340-0- | Ⓢ -21- | WT | NT | 6,5 W | 3000 K | 30°  | 700 mA | 640 Lm | 89 % |
|              | A340-0- | Ⓢ -30- | WT | NT | 6,5 W | 2700 K | 56°  | 700 mA | 610 Lm | 86 % |
|              | A340-0- | Ⓢ -31- | WT | NT | 6,5 W | 3000 K | 56°  | 700 mA | 640 Lm | 86 % |

LED | 48 V | CE | IP20 | CRI > 90 | L80B10 > 60.000 h



#### \*OPTIONS

|   |          |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |

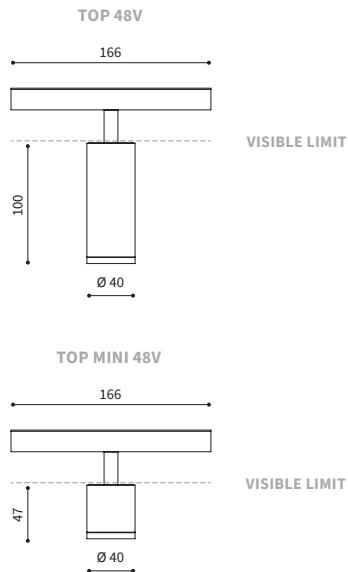

## ACCESSORIES

NOT SOLD SEPARATELY

### TOP High Chromatic LED\*\*



» 366

### TOP Beam Mixer Diffuser\*\*

0805-01-00



### TOP Anti-glare Honeycomb Louver\*\*

0807-00-00

WT | NT |



COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL | AL | PC |

\*\* AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



EXTENDED FAMILY

HOLLY\_276

---

HOLLY 48V



|            |      |       |          |    |    | P     | CCT    | Beam | I      | Flux   | LOR  |
|------------|------|-------|----------|----|----|-------|--------|------|--------|--------|------|
| HOLLY 48 V |      | A349- | Ⓞ -1-00- | WT | NT | 2,1 W | 2700 K | 17°  | 700 mA | 190 Lm | 92 % |
|            |      | A349- | Ⓞ -1-01- | WT | NT | 2,1 W | 3000 K | 17°  | 700 mA | 210 Lm | 92 % |
|            | DALI | A349- | Ⓞ -2-00- | WT | NT | 2,1 W | 2700 K | 17°  | 700 mA | 190 Lm | 92 % |
|            |      | A349- | Ⓞ -2-01- | WT | NT | 2,1 W | 3000 K | 17°  | 700 mA | 210 Lm | 92 % |
|            |      | A349- | Ⓞ -1-10- | WT | NT | 2,1 W | 2700 K | 35°  | 700 mA | 190 Lm | 93 % |
|            |      | A349- | Ⓞ -1-11- | WT | NT | 2,1 W | 3000 K | 35°  | 700 mA | 210 Lm | 93 % |
|            | DALI | A349- | Ⓞ -2-10- | WT | NT | 2,1 W | 2700 K | 35°  | 700 mA | 190 Lm | 93 % |
|            |      | A349- | Ⓞ -2-11- | WT | NT | 2,1 W | 3000 K | 35°  | 700 mA | 210 Lm | 93 % |

LED

48 V

CE

III

IP 20

CRI > 90

L80B10 > 41.000 h

MacAdam Step 3

INCL


TRACK 48V

17° / 35°

| Ⓞ | CORD LENGTH - L |
|---|-----------------|
| 0 | 2 m             |
| 1 | 3 m             |
| 2 | 5 m             |

HOLLY Cord Accessory

0223-00-00- | WT | NT |

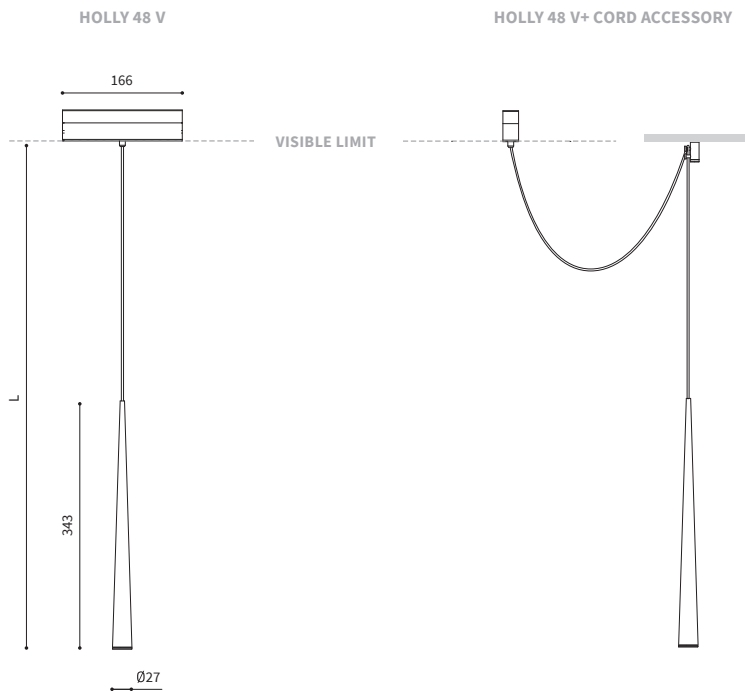



Private Residence Brise Soleil, Valencia (Spain) | Design: Rubén Muedra Estudio de Arquitectura | Photography: Adrián Mora Maroto



EXTENDED FAMILY

SPIN\_278

SPIN 48V



|          |       |          |          |    | P     | CCT    | Beam | I      | Flux   | LOR  |
|----------|-------|----------|----------|----|-------|--------|------|--------|--------|------|
| SPIN 48V | A350- | Ⓢ -1-01- | WT       | NT | 6,5 W | 3000 K | 24°  | 700 mA | 630 Lm | 86 % |
|          | A350- | Ⓢ -1-11- | WT       | NT | 6,5 W | 3000 K | 40°  | 700 mA | 630 Lm | 84 % |
|          | DALI  | A350-    | Ⓢ -2-01- | WT | 6,5 W | 3000 K | 24°  | 700 mA | 630 Lm | 86 % |
|          |       | A350-    | Ⓢ -2-11- | WT | 6,5 W | 3000 K | 40°  | 700 mA | 630 Lm | 84 % |



48 V



IP20

CRI >90

L80B10  
>60.000 h




#### Ⓢ CORD LENGTH - L


|   |     |
|---|-----|
| 0 | 2 m |
| 1 | 3 m |
| 2 | 5 m |

#### SPIN Cord Accessory

0223-00-00- | WT | NT |




#### SPIN 48V

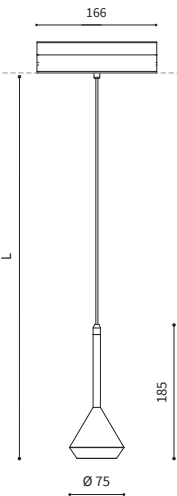

#### SPIN 48V + CORD ACCESSORY

VISIBLE LIMIT

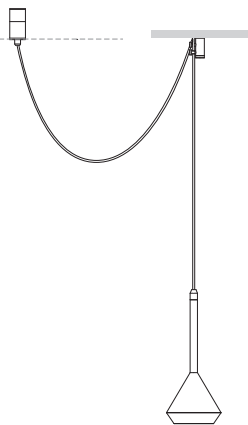

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |


MATERIAL |




PMMA |

» PLEASE CONSULT

TRIMLESS

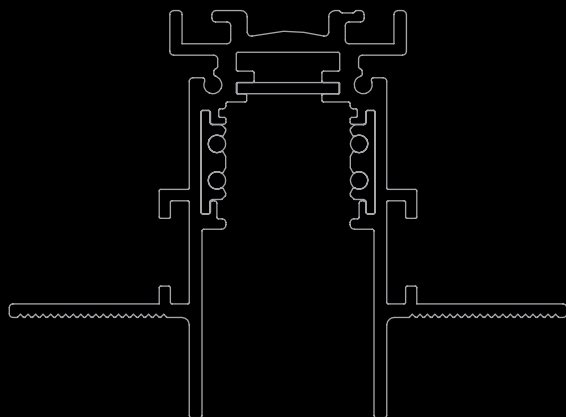

TRACK 48V

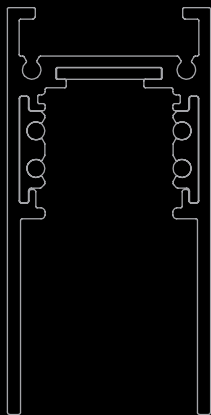

SURFACE

Available on request. Please consult.

---

AVAILABLE FOR

---



SIX



FIT



PLUS



iO



ZEN TUBE



LINE



TOP




HOLLY



SPIN




The new 48Vdc track system offers a huge versatility. It allows you to draw lines, right angle turns and plane changes in corners at 90°. With this system, you may install diffuse light modules, suspended lighting fixtures or spotlights.

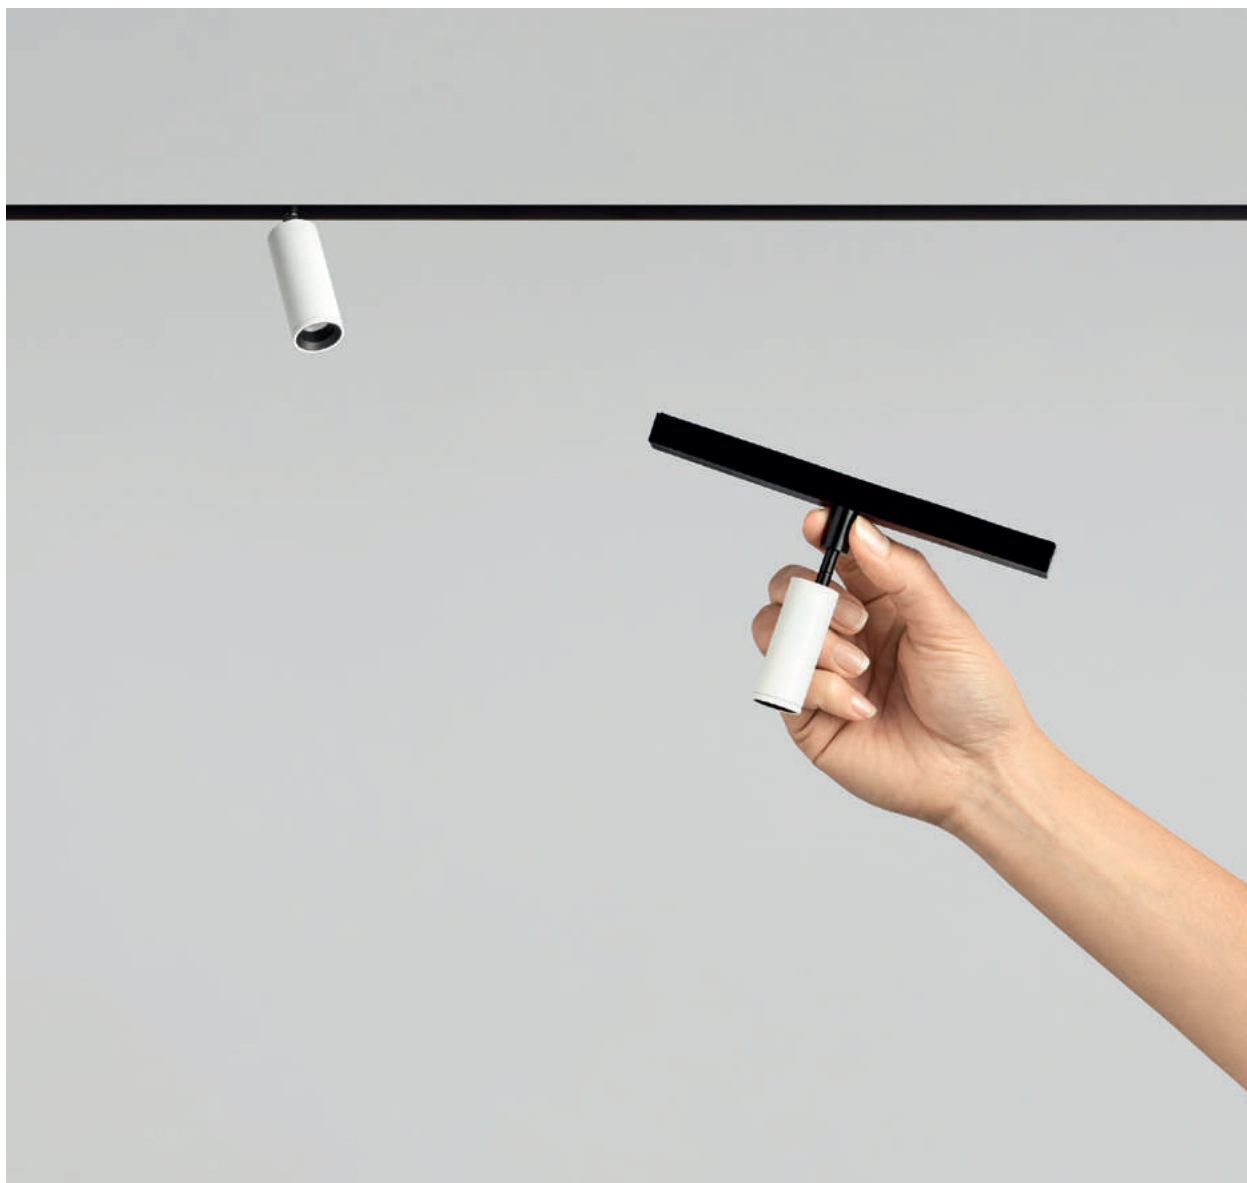


Its manual and tool-less installation system is highly functional and simple.

# TRACK 48 V TRIMLESS



|                                  |             |   |
|----------------------------------|-------------|---|
| TRACK 48 V 1M                    | A338-01-00- | N |
| TRACK 48 V 2M                    | A338-02-00- | N |
| TRACK 48 V 3M                    | A338-03-00- | N |
| TRACK 48 V Corner 90° One Plane  | A338-04-00- | N |
| TRACK 48 V Corner 90° Two Planes | A338-05-00- | N |

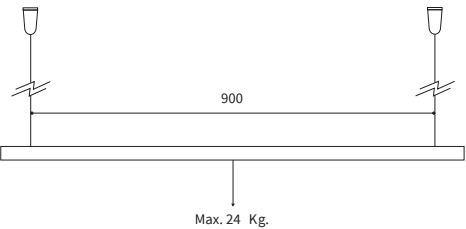

|                                      |                                                                                            | P          | I     | D   |                   |
|--------------------------------------|--------------------------------------------------------------------------------------------|------------|-------|-----|-------------------|
| CONSTANT VOLTAGE<br>LED POWER SUPPLY |  NO DIM | 0434-01-21 | 75 W  | 48V | 180 x 52 x 30 mm  |
|                                      |                                                                                            | 0434-01-22 | 150 W | 48V | 240 x 60 x 49 mm  |
|                                      |  DALI   | 0434-01-19 | 75 W  | 48V | 235 x 100 x 31 mm |
|                                      |                                                                                            | 0434-01-20 | 150 W | 48V | 235 x 100 x 31 mm |


CABLE SECTION AND  
LENGHT BETWEEN  
TRACK 48V AND  
POWER SUPPLY

| TRACK LENGHT (m) |                                  | 10 |    |    | 20 |    | 29 |
|------------------|----------------------------------|----|----|----|----|----|----|
| CABLE LENGHT (m) |                                  | 1  | 10 | 20 | 1  | 10 | 1  |
| POWER (W)        | CABLE SECTION (mm <sup>2</sup> ) |    |    |    |    |    |    |
| 75 W             | 0,75 mm <sup>2</sup>             | ✓  | ✓  | ✓  | ✓  | ✓  | ✓  |
|                  | 1,5 mm <sup>2</sup>              | ✓  | ✓  | ✓  | ✓  | ✓  | ✓  |
| 150 W            | 0,75 mm <sup>2</sup>             | ✓  | X  | X  | ✓  | X  | ✓  |
|                  | 1,5 mm <sup>2</sup>              | ✓  | ✓  | X  | ✓  | ✓  | ✓  |

COLOUR | N ■ RAL 9005 |


RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED  
BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5 mm.)

## TRACK 48V 90° CORNER One Plane




\*Electrical connection included

## TRACK 48V 90° CORNER Two Planes




\*Electrical connection included



### TRACK 48V Live-End Connector

A338-00-01- | N |




### TRACK 48V Central Connector

A338-00-02- | N |




### TRACK 48V Short T-Bracket

A338-00-03



### TRACK 48V Long T-Bracket

A338-00-04



### TRACK 48V Straight Joiners (2 Units)

A338-00-05




### TRACK 48V End

A338-00-06- | N |



### TRACK 48V End Feed

A338-00-07- | N |



### TRACK 48V Suspension Kit

A338-00-08

See accessories quantities\*



### TRACK 48V Clamp for M6 ROD

A338-00-09

See accessories quantities\*



### TRACK 48V Track Clamp

A338-00-10

See accessories quantities\*

### \* SUGGESTED MOUNTING ACCESSORIES QUANTITIES

1000 mm - 2 Pcs.

2000 mm - 3 Pcs.

3000 mm - 4 Pcs.

COLOUR | N ■ RAL 9005 |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED  
BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5 mm.)



SC Private Residence, Valencia (Spain) | Design: Estudio Calma | Photography: Héctor Rubio - Images Positive



EXTENDED FAMILY

iO 48V\_186  
iO SURFACE\_262  
iO RECESSED PROFILE\_326

iO



|    |             |    |    |  | P     | CCT    | Beam | I      | Flux   | LOR  |
|----|-------------|----|----|--|-------|--------|------|--------|--------|------|
| iO | A262-00-10- | WT | NT |  | 4,5 W | 2700 K | 20°  | 500 mA | 485 Lm | 92 % |
|    | A262-00-11- | WT | NT |  | 4,5 W | 3000 K | 20°  | 500 mA | 505 Lm | 92 % |
|    | A262-00-12- | WT | NT |  | 4,5 W | 4000 K | 20°  | 500 mA | 520 Lm | 92 % |
|    | A262-00-20- | WT | NT |  | 4,5 W | 2700 K | 30°  | 500 mA | 485 Lm | 89 % |
|    | A262-00-21- | WT | NT |  | 4,5 W | 3000 K | 30°  | 500 mA | 505 Lm | 89 % |
|    | A262-00-22- | WT | NT |  | 4,5 W | 4000 K | 30°  | 500 mA | 520 Lm | 89 % |
|    | A262-00-30- | WT | NT |  | 4,5 W | 2700 K | 56°  | 500 mA | 485 Lm | 86 % |
|    | A262-00-31- | WT | NT |  | 4,5 W | 3000 K | 56°  | 500 mA | 505 Lm | 86 % |
|    | A262-00-32- | WT | NT |  | 4,5 W | 4000 K | 56°  | 500 mA | 520 Lm | 86 % |

LED | 220-240 V~ | CE | IP20 | CRI >90 | L80B10 >60.000 h



ACCESSORIES

NOT SOLD SEPARATELY


iO High Chromatic LED\*



iO Beam Mixer Diffuser\* 0805-01-00



iO Anti-glare Honeycomb Louver\* 0806-00-00 | WT | NT |

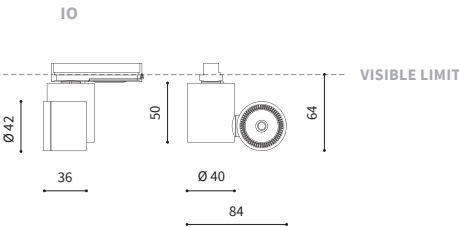

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 | MATERIAL | AL | PC |

\* AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



Photography: Blsimages Architectural Photography

**EXTENDED FAMILY**

PLUS RECESSED\_162

PLUS 48V\_182

PLUS\_218

# PLUS MINI 1L



|              |             |    |    |  | P     | CCT    | Beam      | I      | Flux   | LOR       |
|--------------|-------------|----|----|--|-------|--------|-----------|--------|--------|-----------|
| PLUS Mini 1L | A327-00-20- | WT | NT |  | 4,5 W | 2700 K | 10° - 41° | 500 mA | 480 Lm | 20 - 40 % |
|              | A327-00-21- | WT | NT |  | 4,5 W | 3000 K | 10° - 41° | 500 mA | 500 Lm | 20 - 40 % |
|              | A327-00-22- | WT | NT |  | 4,5 W | 4000 K | 10° - 41° | 500 mA | 515 Lm | 20 - 40 % |


LED | 220 240 V~ | CE | IP 20 | CRI >90 | L80B10 > 60.000 h

MacAdam Step 2 | INCL | TRACK 1L | 350° | 180° | 10°-41° | 10°-41°

ACCESSORY

PLUS MINI High Chromatic LED\*\*


NOT SOLD SEPARATELY

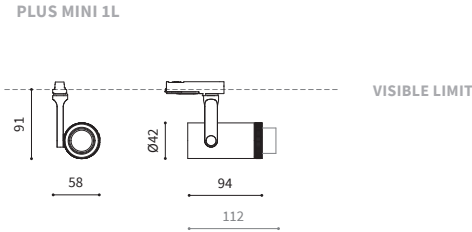


COLOUR | WT ☐ RAL 9016 | NT ☒ RAL 9005 | MATERIAL | AL | OPTICAL PMMA |

\*\* ACCESSORY AFFECTS THE LIGHTING PARAMETERS

SURFACE & SUSPENDED




|             |             |   |   |
|-------------|-------------|---|---|
| TRACK 1L 1m | A264-01-00- | B | N |
| TRACK 1L 2m | A264-02-00- | B | N |
| TRACK 1L 3m | A264-03-00- | B | N |




POLARITY  
GROOVE



|                             |   |   |  |
|-----------------------------|---|---|--|
| TRACK 1L Live-End Connector |   |   |  |
| A264-00-01-                 | B | N |  |
| A264-00-02-                 | B | N |  |




|                        |   |   |  |
|------------------------|---|---|--|
| TRACK 1L Contact Joint |   |   |  |
| A264-00-04-            | B | N |  |




|                            |   |   |  |
|----------------------------|---|---|--|
| TRACK 1L Central Connector |   |   |  |
| A264-00-03-                | B | N |  |




|              |   |   |  |
|--------------|---|---|--|
| TRACK 1L End |   |   |  |
| A264-00-13-  | B | N |  |




|                    |   |   |  |
|--------------------|---|---|--|
| TRACK 1L 90° Angle |   |   |  |
| A264-00-06-        | B | N |  |
| A264-00-07-        | B | N |  |




|                           |   |   |  |
|---------------------------|---|---|--|
| TRACK 1L Corner connector |   |   |  |
| A264-00-15-               | B | N |  |



|                  |   |   |  |
|------------------|---|---|--|
| TRACK 1L T-Joint |   |   |  |
| A264-00-16-      | B | N |  |
| A264-00-17-      | B | N |  |





|                         |    |    |  |
|-------------------------|----|----|--|
| TRACK 1L Suspension Kit |    |    |  |
| A264-00-14-             | WT | NT |  |
| At least 2 units needed |    |    |  |

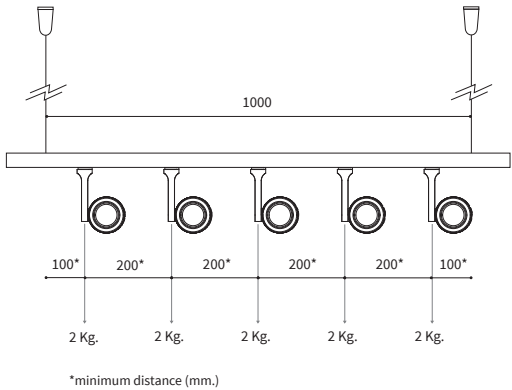


TRACK 1L

FLUSH MOUNTING




|                |    |             |   |   |
|----------------|----|-------------|---|---|
| TRACK 1L FLUSH | 1m | A264-11-00- | B | N |
| TRACK 1L FLUSH | 2m | A264-12-00- | B | N |
| TRACK 1L FLUSH | 3m | A264-13-00- | B | N |




| TRACK 1L FLUSH |   |   |  | Live-End Connector |  |  |  |
|----------------|---|---|--|--------------------|--|--|--|
| A264-00-01-    | B | N |  |                    |  |  |  |
| A264-00-02-    | B | N |  |                    |  |  |  |

|                            |   |             |  |
|----------------------------|---|-------------|--|
| TRACK 1L FLUSH             |   | Cover Plate |  |
| A264-10-19-                | B | N           |  |
| Mandatory for installation |   |             |  |




|                |   |                   |  |
|----------------|---|-------------------|--|
| TRACK 1L FLUSH |   | Central Connector |  |
| A264-00-03-    | B | N                 |  |

|                            |   |                    |  |
|----------------------------|---|--------------------|--|
| TRACK 1L FLUSH             |   | Corner Cover Plate |  |
| A264-10-20-                | B | N                  |  |
| Mandatory for installation |   |                    |  |




|                |   |           |  |
|----------------|---|-----------|--|
| TRACK 1L FLUSH |   | 90° Angle |  |
| A264-00-06-    | B | N         |  |
| A264-00-07-    | B | N         |  |

|                            |   |                    |  |
|----------------------------|---|--------------------|--|
| TRACK 1L FLUSH             |   | Corner Cover Plate |  |
| A264-10-20-                | B | N                  |  |
| Mandatory for installation |   |                    |  |



| TRACK 1L FLUSH |   | T-Joint |  |
|----------------|---|---------|--|
| A264-00-16-    | B | N       |  |
| A264-00-17-    | B | N       |  |

|                            |   |                    |  |
|----------------------------|---|--------------------|--|
| TRACK 1L FLUSH             |   | Corner Cover Plate |  |
| A264-10-20-                | B | N                  |  |
| Mandatory for installation |   |                    |  |




|                        |  |   |  |
|------------------------|--|---|--|
| TRACK 1L Contact Joint |  |   |  |
| A264-00-04-            |  | B |  |
|                        |  | N |  |



|                     |  |  |  |
|---------------------|--|--|--|
| TRACK 1L End        |  |  |  |
| A264-00-13-   B   N |  |  |  |



|                |                |
|----------------|----------------|
| TRACK 1L FLUSH | Suspension Kit |
| A264-10-15     |                |

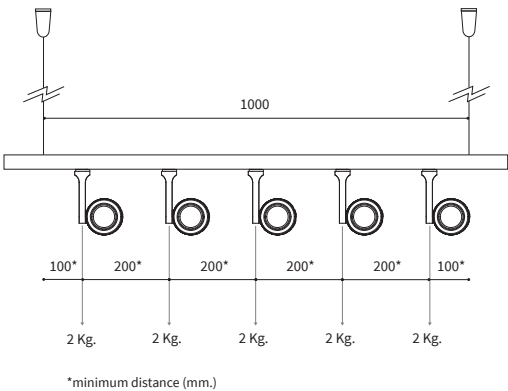

COLOUR | B ☐ RAL 9016 | N ☒ RAL 9005 | WT ☐ RAL 9016 | NT ☒ RAL 9005 |

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5 mm.)



La Ilustre Cerámica exhibition, Alcora (Spain) | Design: Maqla Arquitectura | Photography: Héctor Rubio - Images Positive



EXTENDED FAMILY

SIX RECESSED\_154

SIX 48V\_168

SIX



|         |                |    |    |  | P      | CCT    | Beam | I      | Flux    | LOR  |
|---------|----------------|----|----|--|--------|--------|------|--------|---------|------|
| SIX L 1 | A286-11-10-    | WT | NT |  | 11,5 W | 2700 K | 17°  | 350 mA | 1600 Lm | 93 % |
|         | A286-11-11-    | WT | NT |  | 11,5 W | 3000 K | 17°  | 350 mA | 1650 Lm | 93 % |
|         | A286-11-12-    | WT | NT |  | 11,5 W | 4000 K | 17°  | 350 mA | 1700 Lm | 93 % |
|         | A286-11-30-    | WT | NT |  | 11,5 W | 2700 K | 26°  | 350 mA | 1600 Lm | 93 % |
|         | A286-11-31-    | WT | NT |  | 11,5 W | 3000 K | 26°  | 350 mA | 1650 Lm | 93 % |
|         | A286-11-32-    | WT | NT |  | 11,5 W | 4000 K | 26°  | 350 mA | 1700 Lm | 93 % |
|         | A286-11-20-    | WT | NT |  | 11,5 W | 2700 K | 34°  | 350 mA | 1600 Lm | 90 % |
|         | A286-11-21-    | WT | NT |  | 11,5 W | 3000 K | 34°  | 350 mA | 1650 Lm | 90 % |
|         | A286-11-22-    | WT | NT |  | 11,5 W | 4000 K | 34°  | 350 mA | 1700 Lm | 90 % |
| SIX L 2 | A286-2- ④ -10- | WT | NT |  | 24,5 W | 2700 K | 17°  | 700 mA | 2850 Lm | 93 % |
|         | A286-2- ④ -11- | WT | NT |  | 24,5 W | 3000 K | 17°  | 700 mA | 2950 Lm | 93 % |
|         | A286-2- ④ -12- | WT | NT |  | 24,5 W | 4000 K | 17°  | 700 mA | 3000 Lm | 93 % |
|         | A286-2- ④ -30- | WT | NT |  | 24,5 W | 2700 K | 26°  | 700 mA | 2850 Lm | 93 % |
|         | A286-2- ④ -31- | WT | NT |  | 24,5 W | 3000 K | 26°  | 700 mA | 2950 Lm | 93 % |
|         | A286-2- ④ -32- | WT | NT |  | 24,5 W | 4000 K | 26°  | 700 mA | 3000 Lm | 93 % |
|         | A286-2- ④ -20- | WT | NT |  | 24,5 W | 2700 K | 34°  | 700 mA | 2850 Lm | 90 % |
|         | A286-2- ④ -21- | WT | NT |  | 24,5 W | 3000 K | 34°  | 700 mA | 2950 Lm | 90 % |
|         | A286-2- ④ -22- | WT | NT |  | 24,5 W | 4000 K | 34°  | 700 mA | 3000 Lm | 90 % |




| ④ | *OPTIONS |
|---|----------|
| 1 | No DIM   |
| 4 | DIM DALI |

## ACCESSORY

### SIX L High Chromatic LED\*\*

NOT SOLD SEPARATELY

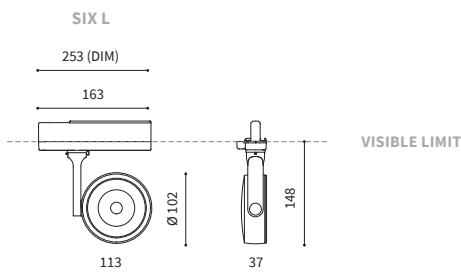

COLOUR | WT ☐ RAL 9016 | NT ☒ RAL 9005 | MATERIAL | ☒ AL | ☐ PC |

\*\* ACCESSORY & COLOURS AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT





|         |                |    |    |  | P      | CCT    | Beam | I      | Flux    | LOR  |
|---------|----------------|----|----|--|--------|--------|------|--------|---------|------|
| SIX M 1 | A331-11-10-    | WT | NT |  | 11,5 W | 2700 K | 19°  | 350 mA | 1600 Lm | 93 % |
|         | A331-11-11-    | WT | NT |  | 11,5 W | 3000 K | 19°  | 350 mA | 1650 Lm | 93 % |
|         | A331-11-12-    | WT | NT |  | 11,5 W | 4000 K | 19°  | 350 mA | 1700 Lm | 93 % |
|         | A331-11-20-    | WT | NT |  | 11,5 W | 2700 K | 28°  | 350 mA | 1600 Lm | 91 % |
|         | A331-11-21-    | WT | NT |  | 11,5 W | 3000 K | 28°  | 350 mA | 1650 Lm | 91 % |
|         | A331-11-22-    | WT | NT |  | 11,5 W | 4000 K | 28°  | 350 mA | 1700 Lm | 91 % |
|         | A331-11-30-    | WT | NT |  | 11,5 W | 2700 K | 38°  | 350 mA | 1600 Lm | 93 % |
|         | A331-11-31-    | WT | NT |  | 11,5 W | 3000 K | 38°  | 350 mA | 1650 Lm | 93 % |
|         | A331-11-32-    | WT | NT |  | 11,5 W | 4000 K | 38°  | 350 mA | 1700 Lm | 93 % |
| SIX M 2 | A331-2- ② -10- | WT | NT |  | 17 W   | 2700 K | 19°  | 500 mA | 2050 Lm | 93 % |
|         | A331-2- ② -11- | WT | NT |  | 17 W   | 3000 K | 19°  | 500 mA | 2130 Lm | 93 % |
|         | A331-2- ② -12- | WT | NT |  | 17 W   | 4000 K | 19°  | 500 mA | 2160 Lm | 93 % |
|         | A331-2- ② -20- | WT | NT |  | 17 W   | 2700 K | 28°  | 500 mA | 2050 Lm | 91 % |
|         | A331-2- ② -21- | WT | NT |  | 17 W   | 3000 K | 28°  | 500 mA | 2130 Lm | 91 % |
|         | A331-2- ② -22- | WT | NT |  | 17 W   | 4000 K | 28°  | 500 mA | 2160 Lm | 91 % |
|         | A331-2- ② -30- | WT | NT |  | 17 W   | 2700 K | 38°  | 500 mA | 2050 Lm | 93 % |
|         | A331-2- ② -31- | WT | NT |  | 17 W   | 3000 K | 38°  | 500 mA | 2130 Lm | 93 % |
|         | A331-2- ② -32- | WT | NT |  | 17 W   | 4000 K | 38°  | 500 mA | 2160 Lm | 93 % |

LED | 220 V~ | CE | IP 20 | CRI >90 | L80B10 >60.000 h




#### ② \*OPTIONS

|   |          |
|---|----------|
| 1 | No DIM   |
| 4 | DIM DALI |

## ACCESSORY

### SIX M High Chromatic LED\*\*

NOT SOLD SEPARATELY

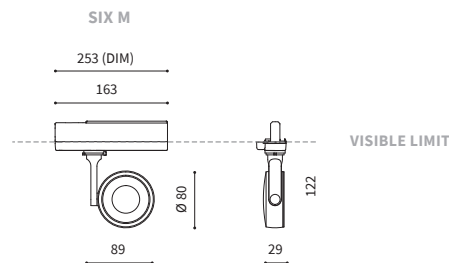

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL | AL | PC |

\*\* ACCESSORY & COLOURS AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



EXTENDED FAMILY

FIT RECESSED\_160

FIT 48V\_174

FIT



|         |         |        |    |    |  | P   | CCT    | Beam | I      | Flux    | LOR  |
|---------|---------|--------|----|----|--|-----|--------|------|--------|---------|------|
| FIT Ø80 | A357-0- | Ⓢ -11- | WT | NT |  | 19W | 3000 K | 19°  | 550 mA | 2500 Lm | 90 % |
|         | A357-0- | Ⓢ -12- | WT | NT |  | 19W | 4000 K | 19°  | 550 mA | 2540 Lm | 90 % |
|         | A357-0- | Ⓢ -21- | WT | NT |  | 19W | 3000 K | 28°  | 550 mA | 2500 Lm | 84 % |
|         | A357-0- | Ⓢ -22- | WT | NT |  | 19W | 4000 K | 28°  | 550 mA | 2540 Lm | 84 % |
|         | A357-0- | Ⓢ -31- | WT | NT |  | 19W | 3000 K | 37°  | 550 mA | 2500 Lm | 85 % |
|         | A357-0- | Ⓢ -32- | WT | NT |  | 19W | 4000 K | 37°  | 550 mA | 2540 Lm | 85 % |




| Ⓢ | *OPTIONS |
|---|----------|
| 1 | No DIM   |
| 2 | DIM DALI |

## ACCESSORY

FIT Ø80 Anti-glare Honeycomb Louver \*\* A357-00-00

NOT SOLD SEPARATELY

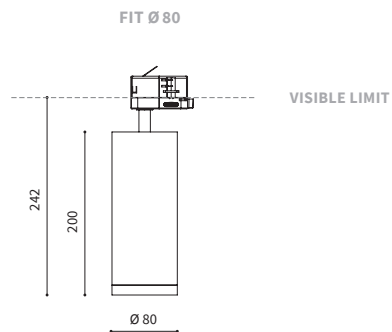

COLOUR | WT ☐ RAL 9016 | NT ☒ RAL 9005 | MATERIAL | ☒ AL | ☐ PC |

\*\* ACCESSORY AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT




|                                                            |             |    |    |  | P                                                           | CCT    | Beam | I      | Flux    | LOR  |
|------------------------------------------------------------|-------------|----|----|--|-------------------------------------------------------------|--------|------|--------|---------|------|
| FIT Ø65                                                    | A356-01-11- | WT | NT |  | 10,3 W                                                      | 3000 K | 18°  | 300 mA | 1300 Lm | 90 % |
|                                                            | A356-01-12- | WT | NT |  | 10,3 W                                                      | 4000 K | 18°  | 300 mA | 1320 Lm | 90 % |
|                                                            | A356-01-21- | WT | NT |  | 10,3 W                                                      | 3000 K | 26°  | 300 mA | 1300 Lm | 88 % |
|                                                            | A356-01-22- | WT | NT |  | 10,3 W                                                      | 4000 K | 26°  | 300 mA | 1320 Lm | 88 % |
|                                                            | A356-01-31- | WT | NT |  | 10,3 W                                                      | 3000 K | 36°  | 300 mA | 1300 Lm | 84 % |
|                                                            | A356-01-32- | WT | NT |  | 10,3 W                                                      | 4000 K | 36°  | 300 mA | 1320 Lm | 84 % |
|                                                            |             |    |    |  |                                                             |        |      |        |         |      |
| LED   220 240 V~   CE   IP20   CRI >90   L80B10 > 60.000 h |             |    |    |  | MacAdam Step 2   INCL   TRACK 3L   360°   90°   18°/26°/36° |        |      |        |         |      |

|                                                            |             |    |    |  | P                                                                  | CCT    | Beam | I      | Flux    | LOR  |
|------------------------------------------------------------|-------------|----|----|--|--------------------------------------------------------------------|--------|------|--------|---------|------|
| FIT Ø65                                                    | A356-02-11- | WT | NT |  | 10,3 W                                                             | 3000 K | 18°  | 300 mA | 1300 Lm | 90 % |
|                                                            | A356-02-12- | WT | NT |  | 10,3 W                                                             | 4000 K | 18°  | 300 mA | 1320 Lm | 90 % |
|                                                            | A356-02-21- | WT | NT |  | 10,3 W                                                             | 3000 K | 26°  | 300 mA | 1300 Lm | 88 % |
|                                                            | A356-02-22- | WT | NT |  | 10,3 W                                                             | 4000 K | 26°  | 300 mA | 1320 Lm | 88 % |
|                                                            | A356-02-31- | WT | NT |  | 10,3 W                                                             | 3000 K | 36°  | 300 mA | 1300 Lm | 84 % |
|                                                            | A356-02-32- | WT | NT |  | 10,3 W                                                             | 4000 K | 36°  | 300 mA | 1320 Lm | 84 % |
|                                                            |             |    |    |  |                                                                    |        |      |        |         |      |
| LED   220 240 V~   CE   IP20   CRI >90   L80B10 > 60.000 h |             |    |    |  | MacAdam Step 2   DALI   INCL   TRACK 3L   360°   90°   18°/26°/36° |        |      |        |         |      |

## ACCESSORY

FIT Ø65 Anti-glare Honeycomb Louver \*\* A356-00-00

NOT SOLD SEPARATELY

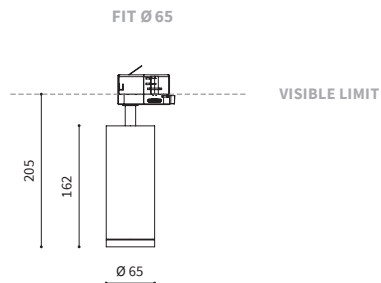

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 | MATERIAL | AL | PC |

\*\* ACCESSORY AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT





Photography: Jesús Granada. Fotografía de Arquitectura

# PLUS

**EXTENDED FAMILY**

PLUS RECESSED\_162

PLUS 48V\_182

PLUS MINI 1L\_206



|      |             |    |    | P      | CCT    | Beam      | I      | Flux    | LOR       |
|------|-------------|----|----|--------|--------|-----------|--------|---------|-----------|
| PLUS | A324-00-00- | WT | NT | 10,4 W | 2700 K | 12° - 51° | 300 mA | 1260 Lm | 26 - 40 % |
|      | A324-00-01- | WT | NT | 10,4 W | 3000 K | 12° - 51° | 300 mA | 1310 Lm | 26 - 40 % |
|      | A324-00-02- | WT | NT | 10,4 W | 4000 K | 12° - 51° | 300 mA | 1330 Lm | 26 - 40 % |



|           |             |    |    | P     | CCT    | Beam      | I      | Flux   | LOR       |
|-----------|-------------|----|----|-------|--------|-----------|--------|--------|-----------|
| PLUS Mini | A327-00-10- | WT | NT | 4,5 W | 2700 K | 10° - 41° | 500 mA | 480 Lm | 20 - 40 % |
|           | A327-00-11- | WT | NT | 4,5 W | 3000 K | 10° - 41° | 500 mA | 500 Lm | 20 - 40 % |
|           | A327-00-12- | WT | NT | 4,5 W | 4000 K | 10° - 41° | 500 mA | 515 Lm | 20 - 40 % |




## ACCESSORY

PLUS High Chromatic LED\*

PLUS MINI High Chromatic LED\*

NOT SOLD SEPARATELY

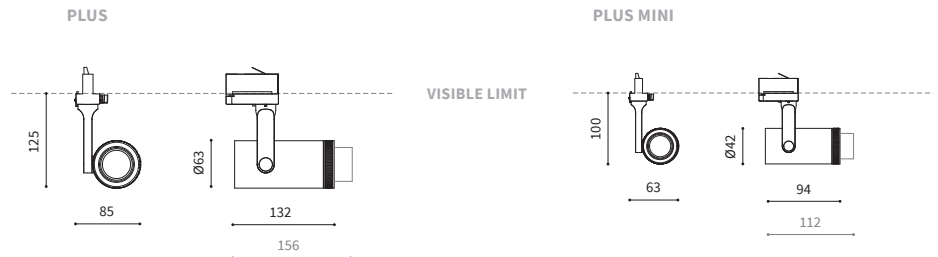

COLOUR | WT ☐ RAL 9016 | NT ☒ RAL 9005 | MATERIAL | ☒ AL | ☐ OPTICAL GLASS |

\* ACCESSORY AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



Federal Café, Valencia (Spain) | Design: Hadit Arquitectos | Photography: Héctor Rubio - Images Positive



ZEN



|       |          |          |       |    |    | P    | CCT    | I   | Flux | LOR  |
|-------|----------|----------|-------|----|----|------|--------|-----|------|------|
| ZEN 1 | A283-01- | Ø -1-    | WT    | NT |    | 12 W | 3000 K | 350 | 1640 | 90 % |
|       | A283-01- | Ø -2-    | WT    | NT |    | 12 W | 4000 K | 350 | 1670 | 90 % |
| ZEN 2 | A283-02- | Ø -1-    | WT    | NT |    | 17 W | 3000 K | 500 | 2220 | 90 % |
|       | A283-02- | Ø -2-    | WT    | NT |    | 17 W | 4000 K | 500 | 2250 | 90 % |
|       | DALI     | A283-12- | Ø -1- | WT | NT | 17 W | 3000 K | 500 | 2220 | 90 % |
|       |          | A283-12- | Ø -2- | WT | NT | 17 W | 4000 K | 500 | 2250 | 90 % |
| ZEN 3 | A283-03- | Ø -1-    | WT    | NT |    | 23 W | 3000 K | 700 | 3190 | 90 % |
|       | A283-03- | Ø -2-    | WT    | NT |    | 23 W | 4000 K | 700 | 3240 | 90 % |
|       | DALI     | A283-13- | Ø -1- | WT | NT | 23 W | 3000 K | 700 | 3190 | 90 % |
|       |          | A283-13- | Ø -2- | WT | NT | 23 W | 4000 K | 700 | 3240 | 90 % |

LED | 220-240 V~ | | CE | IP20 | CRI >90 | L80B10 >60.000 h

MacAdam Step 2

INCL

TRACK 3L

325°

270°

16° / 24° / 42°

#### Ø BEAM OPTIONS

|   |     |
|---|-----|
| 1 | 16° |
| 2 | 24° |
| 3 | 42° |

## ACCESSORIES

NOT SOLD SEPARATELY

### ZEN High Chromatic LED\*

LED

### ZEN Anti-glare Honeycomb Louver \* 0702-02-00




### ZEN Elliptical Refractor \* 0700-08-00



### ZEN Beam Mixer Diffuser\* 0805-02-00



ZEN

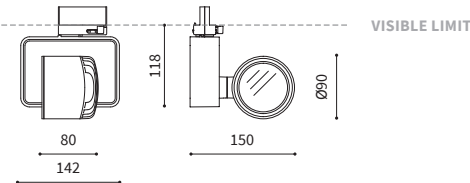

COLOUR | WT RAL 9016 | NT RAL 9005 |

MATERIAL | AL | GL-TRANS |

OTHER CCT PLEASE CONSULT | \* AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



RS - Barcelona Showroom | Photography: Meritxell Arjalaguer



EXTENDED FAMILY

ZEN TUBE 48V\_188

ZEN TUBE SURFACE\_266

# ZEN TUBE



|            |          |       |    |    |  | P    | CCT    | I      | Flux    | LOR  |
|------------|----------|-------|----|----|--|------|--------|--------|---------|------|
| ZEN TUBE 1 | A284-21- | Ø -1- | WT | NT |  | 12 W | 3000 K | 350 mA | 1640 Lm | 90 % |
|            | A284-21- | Ø -2- | WT | NT |  | 12 W | 4000 K | 350 mA | 1670 Lm | 90 % |
| ZEN TUBE 2 | A284-22- | Ø -1- | WT | NT |  | 17 W | 3000 K | 500 mA | 2220 Lm | 90 % |
|            | A284-22- | Ø -2- | WT | NT |  | 17 W | 4000 K | 500 mA | 2250 Lm | 90 % |
| ZEN TUBE 3 | A284-23- | Ø -1- | WT | NT |  | 23 W | 3000 K | 700 mA | 3190 Lm | 90 % |
|            | A284-23- | Ø -2- | WT | NT |  | 23 W | 4000 K | 700 mA | 3240 Lm | 90 % |

LED

220  
240 V ~

CE

IP 20

CRI > 90

L80B10  
> 60.000 h

MacAdam  
Step 2

INCL

#### Ø BEAM OPTIONS

|   |     |
|---|-----|
| 1 | 16° |
| 2 | 24° |
| 3 | 42° |

## ACCESSORIES

NOT SOLD SEPARATELY

### ZEN High Chromatic LED\*



### ZEN Anti-glare Honeycomb Louver \*

0702-02-00



### ZEN Elliptical Refractor \*

0700-08-00




### ZEN Beam Mixer Diffuser\*

0805-02-00



#### ZEN TUBE

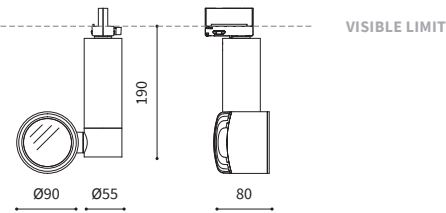

COLOUR | WT RAL 9016 | NT RAL 9005 |

MATERIAL | AL | GL-TRANS |

OTHER CCT PLEASE CONSULT | \* AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



---

THOR



|        |                                                                                           |          |       |    |    | P      | CCT    | I      | Flux    | LOR     |      |
|--------|-------------------------------------------------------------------------------------------|----------|-------|----|----|--------|--------|--------|---------|---------|------|
| THOR 1 | A226-11-                                                                                  | ⓪ -1-    | WT    | NT |    | 23,5 W | 3000 K | 700 mA | 3350 Lm | 90 %    |      |
|        | A226-11-                                                                                  | ⓪ -2-    | WT    | NT |    | 23,5 W | 4000 K | 700 mA | 3400 Lm | 90 %    |      |
| THOR 2 | A226-21-                                                                                  | ⓪ -1-    | WT    | NT |    | 32,5 W | 3000 K | 950 mA | 4360 Lm | 90 %    |      |
|        | A226-21-                                                                                  | ⓪ -2-    | WT    | NT |    | 32,5 W | 4000 K | 950 mA | 4430 Lm | 90 %    |      |
|        | <br>DALI | A226-24- | ⓪ -1- | WT | NT |        | 32,5 W | 3000 K | 950 mA  | 4360 Lm | 90 % |
|        |                                                                                           | A226-24- | ⓪ -2- | WT | NT |        | 32,5 W | 4000 K | 950 mA  | 4430 Lm | 90 % |

LED | 220 240 V~ | CE | IP20 | CRI >90 | L80B10 > 60.000 h



## ACCESSORIES

### ⓪ BEAM OPTIONS

|   |     |
|---|-----|
| 1 | 17° |
| 2 | 28° |
| 3 | 40° |

### THOR High Chromatic LED\*

NOT SOLD SEPARATELY



### THOR Anti-glare Screen\*

0802-00-00- | WT |

0802-00-00- | NT |



### THOR Anti-glare Honeycomb Louver\*

0802-02-00

NOT SOLD SEPARATELY



### THOR Elliptical Refractor\*

0802-04-00


NOT SOLD SEPARATELY



### THOR Beam Mixer Diffuser\*

0805-03-00

NOT SOLD SEPARATELY

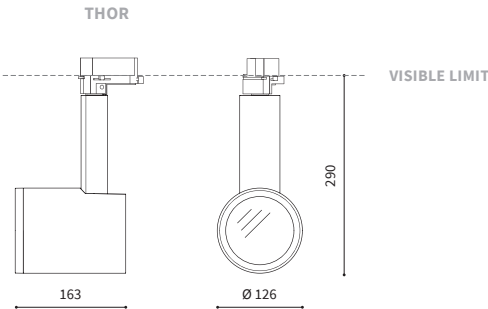

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |


MATERIAL | AL | GL-TRANS |

OTHER CCT PLEASE CONSULT | \* AFFECTS THE LIGHTING

PARAMETERS

» PLEASE CONSULT


TRACK 3L+N SURFACE & SUSPENDED



|             |             |   |   |
|-------------|-------------|---|---|
| TRACK 3L 1m | A282-01-00- | B | N |
| TRACK 3L 2m | A282-02-00- | B | N |
| TRACK 3L 3m | A282-03-00- | B | N |



TRACK 3L+N FLUSH MOUNTING\*




|                   |             |   |   |
|-------------------|-------------|---|---|
| TRACK 3L FLUSH 1m | A282-11-00- | B | N |
| TRACK 3L FLUSH 2m | A282-12-00- | B | N |
| TRACK 3L FLUSH 3m | A282-13-00- | B | N |



WEIGHT BEAR CAPACITY

Fastening distance and loading capacity.  
Recommended fastening distance l~ 1000 mm.

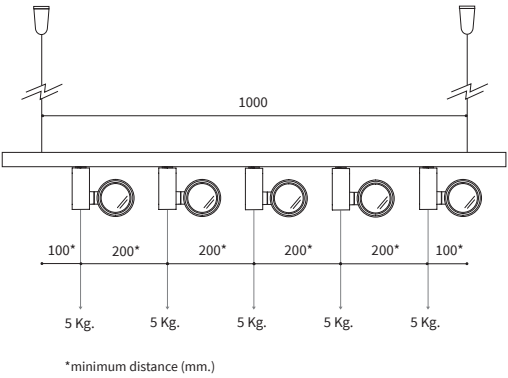


ACCESSORIES

FIT MODEL: ACCESSORIES ONLY IN BLACK FINISH  
SIX MODEL: ACCESSORIES NOT AVAILABLE


TRACKLIGHT Surface Adapter

|             |   |
|-------------|---|
| 0000-55-43- | W |
| 0000-55-39- | N |



TRACKLIGHT Recessed Adapter


|             |   |
|-------------|---|
| 0000-55-44- | W |
| 0000-55-40- | N |



TRACK 3L

## SURFACE & SUSPENDED


POLARITY  
GROOVE



### TRACK 3L Live-End Connector

A282-00-01- | B | N |

A282-00-02- | B | N |




### TRACK 3L Central Connector

A282-00-03- | B | N |




### TRACK 3L Ceiling Kit

A219-21-06- | B | N |



### TRACK 3L Universal Angle


A282-00-15- | B | N |



### TRACK 3L 90° Angle

A282-00-06- | B | N |


A282-00-07- | B | N |



### TRACK 3L T Joint


A282-00-16- | B | N |

A282-00-17- | B | N |



### TRACK 3L Mechanical Joint

A219-21-11- | B | N |




### TRACK 3L Suspension Kit

A219-21-10- | B | N |

At least 2 units needed

## FLUSH MOUNTING\*

POLARITY  
GROOVE



### TRACK 3L Live-End Connector


A282-00-01- | B | N |

A282-00-02- | B | N |

### TRACK 3L FLUSH Cover Plate

A282-10-19- | B | N |

Mandatory for installation



### TRACK 3L Central Connector

A282-00-03- | B | N |

### TRACK 3L FLUSH Cover Plate


A282-10-19- | B | N |

Mandatory for installation



### TRACK 3L FLUSH Ceiling Kit

A219-22-06- | B |



### TRACK 3L 90° Angle


A282-00-06- | B | N |

A282-00-07- | B | N |

### TRACK 3L FLUSH Corner Cover Plate

A282-10-20- | B | N |

Mandatory for installation



### TRACK 3L T Joint

A282-00-16- | B | N |


A282-00-17- | B | N |

### TRACK 3L FLUSH Corner Cover Plate

A282-10-20- | B | N |

Mandatory for installation

## SURFACE & SUSP. / FLUSH MOUNTING




### TRACK Contact Joint

A282-00-04- | B | N |



### TRACK End

A219-20-02- | B | N |



### TRACK Bending Tool

A282-00-00

For tracks its lenght has been modified

COLOUR | B ☐ RAL 9016 | N ☒ RAL 9005 |

\* RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED  
BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5 mm.)


TRACK 3L+N SURFACE & SUSPENDED




|             |             |   |   |
|-------------|-------------|---|---|
| TRACK 3L 1m | A219-21-01- | B | N |
| TRACK 3L 2m | A219-21-02- | B | N |
| TRACK 3L 3m | A219-21-03- | B | N |



TRACK 3L+N FLUSH MOUNTING\*

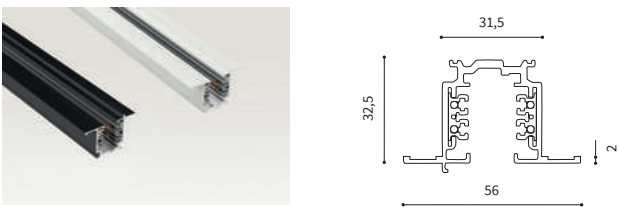

|                   |             |   |   |
|-------------------|-------------|---|---|
| TRACK 3L FLUSH 1m | A219-22-01- | B | N |
| TRACK 3L FLUSH 2m | A219-22-02- | B | N |
| TRACK 3L FLUSH 3m | A219-22-03- | B | N |

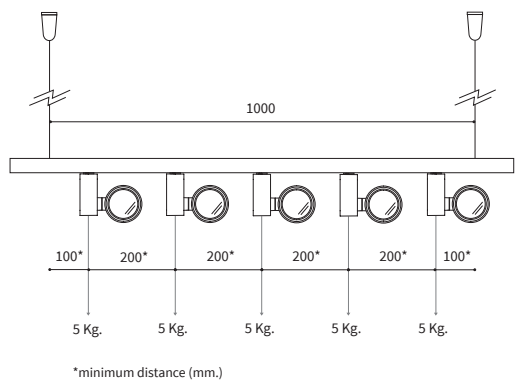

WEIGHT BEAR CAPACITY

Fastening distance and loading capacity.  
Recommended fastening distance l~ 1000 mm.

## SURFACE & SUSPENDED

**TRACK 3L Live-End Connector**

A219-21-04- | B | N |

A219-21-12- | B | N |

**TRACK 3L Central Connector**

A219-21-05- | B | N |

**TRACK 3L Ceiling Kit**

A219-21-06- | B | N |

**TRACK 3L Universal Angle**

A219-21-07- | B | N |

**TRACK 3L 90° Angle**

A219-21-08- | B | N |

A219-21-13- | B | N |

**TRACK 3L T Joint**

A219-21-09- | B | N |

A219-21-14- | B | N |

**TRACK 3L Mechanical Joint**

A219-21-11- | B | N |

**TRACK 3L Suspension Kit**

A219-21-10- | B | N |

At least 2 units needed

**COLOUR** | B ☐ RAL 9016 | N ☐ RAL 9005 |

## FLUSH MOUNTING\*

**TRACK 3L FLUSH Live-End Connector**

A219-21-04- | B | N |

A219-21-12- | B | N |

**TRACK 3L FLUSH Cover Plate**

A219-22-10- | B | N |

Mandatory for installation

**TRACK 3L FLUSH Central Connector**

A219-21-05- | B | N |

**TRACK 3L FLUSH Cover Plate**

A219-22-10- | B | N |

Mandatory for installation

**TRACK 3L FLUSH Ceiling Kit**

A219-22-06- | B |

**TRACK 3L FLUSH 90° Angle**

A219-21-08- | B | N |

A219-21-13- | B | N |

**TRACK 3L FLUSH Corner Cover Plate**

A219-22-11- | B | N |

Mandatory for installation

**TRACK 3L T Joint**

A219-21-09- | B | N |

A219-21-14- | B | N |

**TRACK 3L FLUSH Corner Cover Plate**

A219-22-11- | B | N |

Mandatory for installation

## SURFACE & SUSP. / FLUSH MOUNTING

**TRACK Contact Joint**

A219-20-01- | B | N |

**TRACK End**

A219-20-02- | B | N |

**TRACK Bending Tool**

A282-00-00

For tracks its lenght has been modified

\* RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5 mm.)



**LIGHTING  
BROTHERS**

[www.lightingbrothers.com](http://www.lightingbrothers.com)